


CRYSTAL FILTER SPECIFICATIONS

1. OPT Part Number : F9387
2. Electrical
 - 2.1 . Center Frequency (Fo) : 70.0 MHz
 - 2.2 . Passband Width @ -3 db : +/- 100 KHz min
 - 2.3 . Ripple : 1.0db max @ Fo +/- 80 KHz
 - 2.4 . Insertion Loss : 5 db max
 - 2.5 . Stopband With @ - 40 db : +/- 300 KHz max
 - 2.6 . Ultimate Attenuation : 50 db
 - 2.7 . Impedance $Z_{in} = Z_{out}$: 50 Ohms
 - 2.8 . Input Power : 0 dbm nominal , 10 dbm max nondistractive
 - 2.9 . Operating Temp. (T_a) : - 30 °C to + 70 °C

3. Other Specifications:

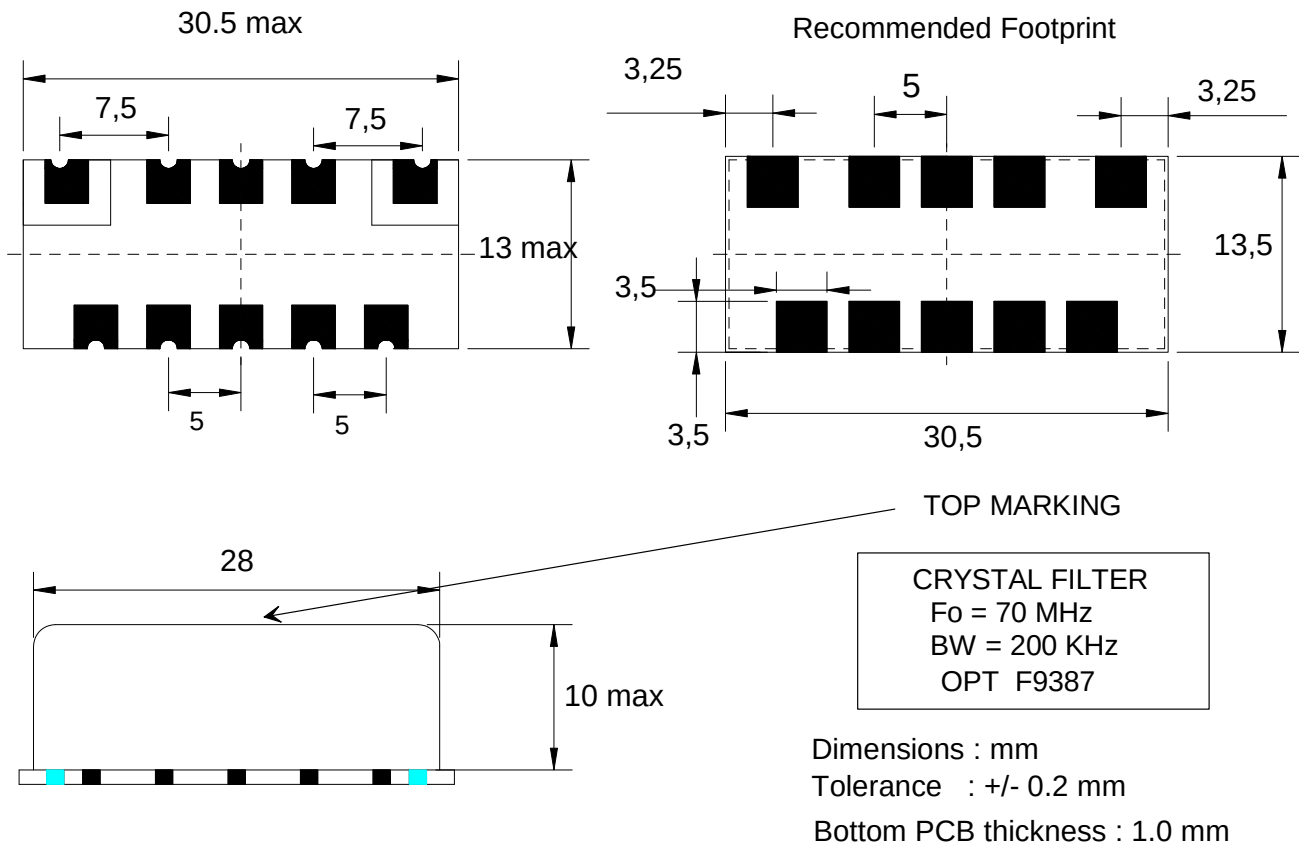

				OPT HELLAS Spata , Greece TITLE: Electrical Specifications	DRWN : GL	DATE : 08.05.13
					APPR :	DATE : 08.05.13
					P/N : F9387	
A	Released to Production	08.05.13			SHEET : 1 OF 1	
RV	DESCRIPTION	DATE	APPR			